


C330S

Cable Diagram

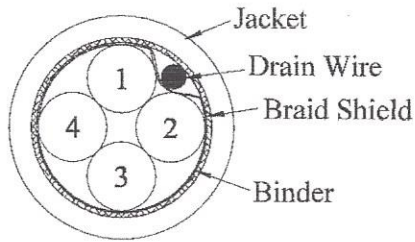

Components

Four 22 AWG Insulated Conductors

Conductor: 22 AWG, 7/30 tinned copper

Insulation: .016" nominal wall of PVC (see color code)

Jacket: .005" nominal wall of Clear Nylon

NOM OD .072"

Overall Cable Construction

Cabling: Four 22 AWG Insulated Conductors cabled together

Foil Shield: Aluminum-Mylar tape, Aluminum side OUT

Drain Wire: 22 AWG, 7/30 tinned copper

Braid Shield: 38 AWG tinned copper braid, 90% coverage

Jacket: .045" nominal wall TPE (TPWO)

NOM OD .285" (7.2mm)

Jacket Color: Yellow (Reference Pantone Yellow 107)

Print

HONEYWELL - C330S E193849 4/C 22 AWG (UL) ITC 105C SUN RES OIL RES II
OR AWM 21270 --- LL41103 CSA CIC PVC/N 90C DRY 300V SHIELDED FT4

Color Code

1. White 2. Red 3. Black 4. Green

Requirements

Temperature: 105°C
Voltage: 300V (ITC/CIC)
600V (AWM)

Jacket: Passes -40°C Cold Impact Test

Approvals: UL Type ITC
UL AWM Style 21270
CSA CIC FT4
UV / Sunlight Resistant
Oil Resistant II
RoHS Compliant